


LASER AND THERMAL CAMERAS

BRAVO LASER ROTATIVO INCLIGRAD

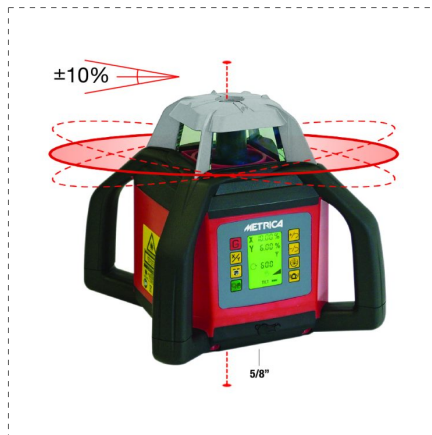

DETAILS

- High-sensitivity receiver with deviation indication in mm
- Metal cover
- Creates a horizontal, vertical or inclined plane that can be adjusted by $\pm 10\%$ in X and Y direction and two plumb lines
- Adjustment of the inclined plane shown on the display
- By rotating the unit 90° , the unit generates a vertical self-leveled laser plane and two horizontal beams
- SCANNER function to project a more visible and shorter line (adjustable to 4 lengths: $10^\circ - 45^\circ - 90^\circ - 90^\circ - 180^\circ$)
- TILT function: In case of unintentional movement the device switches off the laser beam.
- Step-by-step rotation function
- MANUAL function which excludes automatic levelling
- Laser with 4 rubberized handles for easier grip and increased protection
- Remote control reception on the 4 sides of the unit for adjusting the X and Y axis inclinations
- Rechargeable batteries and charger included or alternatively 4 alkaline batteries 1.5 V LR14

TECHNICAL DATA SHEET

PARAMETER	VALUE
Leveling accuracy	horizontal $\pm 3 \text{ mm} / 30 \text{ m}$ vertical $\pm 5 \text{ mm} / 30 \text{ m}$
Self-leveling range	$\pm 5^\circ$
Slopes of setting range	$\pm 10\%$
Autonomy	30 hours
Working range	500 m (with receiver)
Rotational speeds	0-60-120-300-600 rpm
Scanner function	$10^\circ - 45^\circ - 90^\circ - 180^\circ$
Tilt function	yes
Signal out self-leveling	yes
Laser type	635 nm, 1 mW
Laser output	Class 2

PARAMETER	VALUE
Rechargeable batteries	4 x C4000 mAh 1,2 V NI-MH
Dimensions	220 x 220 x 210 mm
Operating temperature	-10°C / +50°C
Weight (without batteries)	3,5 Kg
IP Protection	IP 54
Tripod thread	5/8"
Remote control distance	20 / 50 m (in/out)
Batteries for remote control	2 x 15 V DC
Batteries for receiver	1 x 9 V DC

ARTICLES OF THE RANGE

Ref.		
61345	8001066613458	1

GALLERY

