
LASER AND THERMAL CAMERAS

300 ZOOM

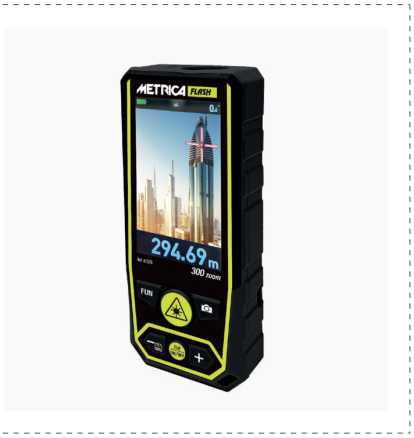

DETAILS

- Camera up to 300 m
- 4x zoom and Point Finder viewfinder
- Photos with measurements
- Screen capture with recorded measurement
- 100 photo memory with measurements
- Exclusive HAS (Horizontal Sound Assistant) function
- Horizontal/vertical inclinometer with indicator
- Point-to-point function: provides distances from 2 points in space
- Accuracy ± 2 mm
- IP 65
- Rechargeable cable or wireless batteries
- Surface, cylinder and cylinder volume triangle trapezoid function
- Screen rotation
- 1/4” thread for tripod connection
- 5 Pythagoras functions
- Black and white screen selection

TECHNICAL DATA SHEET

PARAMETER	VALUE
Range	0,2-300 m
Accuracy	+/- (2,0 mm+5x10-5 D)
HSA Technology	yes
Individual measurement	yes
Continuous measurement	yes
Area	yes
volume	yes
Pythagoras	yes
Auto level	yes
Automatic height	yes

PARAMETER	VALUE
Point-to-point (P2P)	yes
Trapeze	yes
Triangle area	yes
Cylindrical volume	yes
Step-by-step function	yes
Delayed measurement	yes
Point finder camera	yes
Constant adjustment	yes
Addition/subtraction	yes
Tilt sensor	yes
Wireless charging	yes
Screen rotation	yes
3” HD color display	yes
Indoor/outdoor display brightness	yes
USB interface Micro USB	yes
Storage	100 screenshots
Memory	1000 measurements
Reference measurement: sup/inf/tripod	yes
Unit m/ft/in/ft+in/mm	yes
Automatic shutdown	after 180s of inactivity
Protection class	IP65
Laser class	Class 2
Laser type	630-670nm, <1mW
Battery type	3*AAA NI-MH rechargeable
Operating Temperature	0 C~+40 C (32 F~+104 F)
Dimensions mm	130x54x28
Weight with battery	190g


ARTICLES OF THE RANGE

Ref.	L		
61270	0,05 - 300 m	8001066612703	1

GALLERY




POINT 2 POINT


min
max
m²
m³
HSA
digital